

# INSTRUCTION MANUAL

## Orion® Versatile Tripod Adapter for Binoculars #5271

Congratulations on your purchase of the Orion Versatile Tripod Adapter for Binoculars! This quality adapter is ideal for mounting binoculars up to 80mm in aperture on a tripod equipped with a 1/4"-20 attachment stud, for comfortable, steady viewing. Made of solid cast aluminum, the adapter's sturdy stem is slim enough to accommodate both roof-prism and porro-prism binoculars – hence, the "versatile" in its name. We hope you enjoy using the Versatile Tripod Adapter and wish you many years of rewarding viewing!

### Setup


Familiarize yourself with the parts of the Versatile Tripod Adapter by referring to **Figure 1**.

To attach the Versatile Tripod Adapter to a tripod:

1. Thread the 1/4"-20 stud on the tripod mounting shoe into the threaded socket on the bottom of the adapter until tight. The bottom of the Versatile Tripod Adapter has a rubber grip pad to ensure a firm grip on the tripod's mounting shoe. **Figure 2** shows the adapter attached to the tripod.

To attach the binoculars to the Versatile Tripod Adapter:

1. Make sure the tripod's altitude axis is locked to prevent sudden rotation when the binoculars are mounted on the adapter.
2. Remove the cap from the binoculars' threaded mounting socket, which

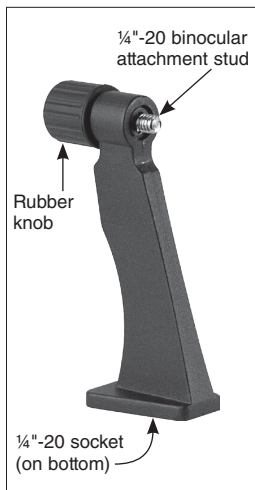

**Figure 1.** The Orion Versatile Tripod Adapter for Binoculars




**Figure 2.** The Versatile Tripod Adapter installed on a tripod head.



Corporate Offices: 89 Hangar Way, Watsonville CA 95076 - USA  
Toll Free USA & Canada: (800) 447-1001  
International: +1(831) 763-7000  
Customer Support: support@telescope.com

Copyright © 2020 Orion Telescopes & Binoculars. All Rights Reserved. No part of this product instruction or any of its contents may be reproduced, copied, modified or adapted, without the prior written consent of Orion Telescopes & Binoculars.

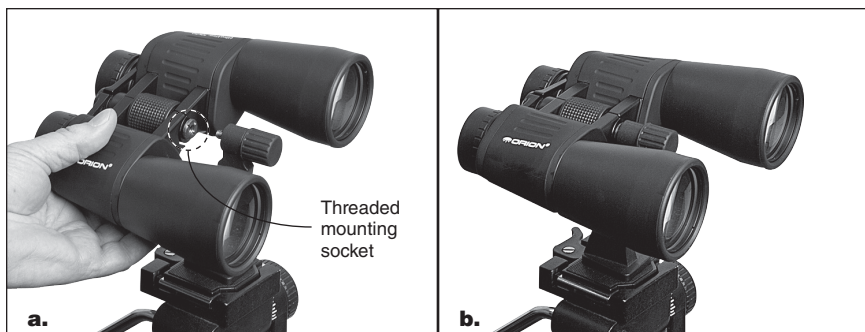

**Figure 3.** Screw the adapter's attachment stud into the threaded mounting socket (a) of the binocular, then your binocular will be properly installed on the tripod (b).

is usually located between the two binocular barrels on the front of the barrel fulcrum, or "bridge."

- Line up the binoculars' threaded mounting socket with the adapter's 1/4"-20 stud, then thread it in by turning the ribbed rubber knob clockwise until tight (**Figure 3**).

Now you're all set to explore the world around you with your tripod-mounted binoculars!

### Specifications

Dimensions	4.2"H x 1.3"W x 2.1"D
Width of adapter stem	5/16" – 7/16"
Material	Cast aluminum
Attachment bolt	1/4"-20, 1/4" exposed length, captive
Compatible binocular design	Roof prism or Porro prism
Compatible binocular size	Up to 80mm aperture
Weight	3.0 oz.

## One-Year Limited Warranty

This Orion product is warranted against defects in materials or workmanship for a period of one year from the date of purchase. This warranty is for the benefit of the original retail purchaser only. During this warranty period Orion Telescopes & Binoculars will repair or replace, at Orion's option, any warranted instrument that proves to be defective, provided it is returned postage paid. Proof of purchase (such as a copy of the original receipt) is required. This warranty is only valid in the country of purchase.

This warranty does not apply if, in Orion's judgment, the instrument has been abused, mishandled, or modified, nor does it apply to normal wear and tear. This warranty gives you specific legal rights. It is not intended to remove or restrict your other legal rights under applicable local consumer law; your state or national statutory consumer rights governing the sale of consumer goods remain fully applicable.

For further warranty information, please visit [www.OrionTelescopes.com/warranty](http://www.OrionTelescopes.com/warranty).